

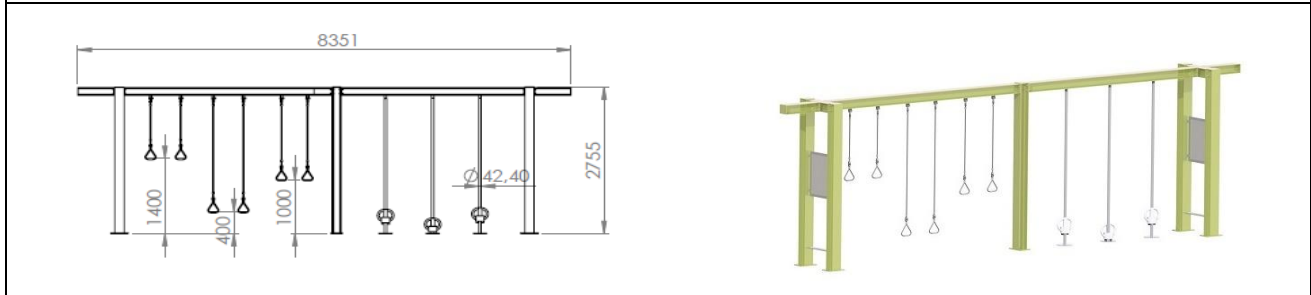


DSW4933/4983 Crosstraining Dumbbells - TRX technical information

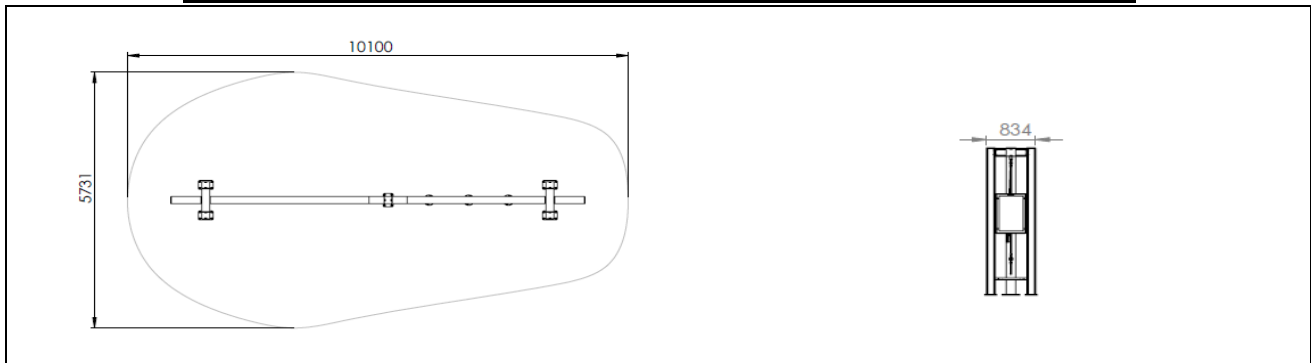


| | Posts | Bars | Dumbbells | Trapeze rings |
|--|---|------------------------------|--|--|
| Material | HEA profile, steel, hot dipped galvanized and texture powder coated in Lime green (more colours possible) | steel, hot dipped galvanized | Stainless steel Dumbbell of 4, 6 and 8 kg weight | Aluminium Handle, Stainless Steel 304 swivel, Nylon Spacer, Nylon Thimble, 16mm 6x8 Braided Nylon rope |
| Dimensions | Bars: Ø 42,4 x 3,25 mm | | Dumbbell: Ø 33,7 mm | |
| Area of movement | approx. 47 m ² | | | |
| free height of fall | 400 mm | | | |
| Fall protection according EN16630 | No | | | |
| intended for | youth and adults >1400 mm | | | |
| max. user weight | 120 kg | | | |

Anchoring
 750mm in the ground with Ø 230 and Ø 115 mm frames. HEA profiles on 900mm square frames.
 The installation frames need to be secured with fast-setting concrete. Every hole for the round frames should be 500x500x750mm and around 0,12m³ concrete is needed. For the square frames the holes are 600x600x900 and around 0,10m³ concrete is needed. The soil should be packed tightly. Follow the instructions in the installation manual.

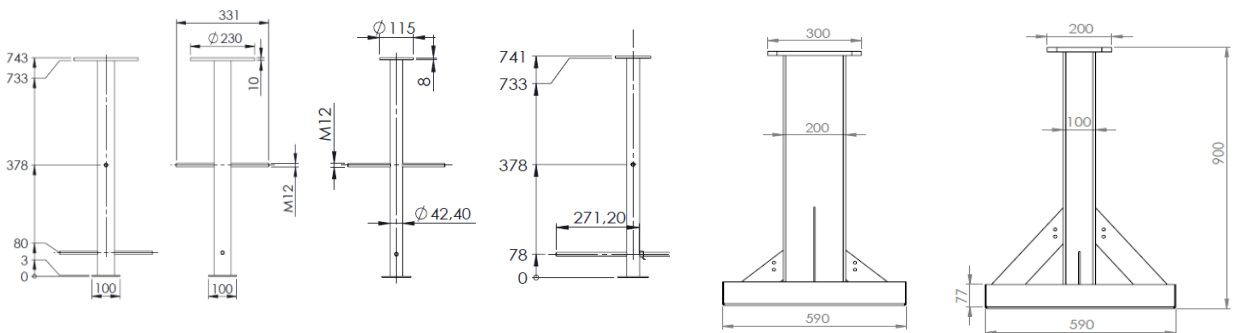

On concrete: with Ø 230 mm ground plate and with 300x200 square plate
 Follow the instructions in the installation manual.



| | |
|-----------------------|---|
| Notice: | <p><i>Not intended for children < 1400 mm</i></p> <p><i>The Denfit StreetWorkout equipment should not be used if you are suffering from physiological problems. Avoid exaggerated physical exhaustion. In case of doubt please contact your doctor before use. Inspect the equipment before use. Don't use it if it appears damaged or inoperable.</i></p> |
| Certification: | EN16630:2015 - for permanently installed outdoor fitness equipment |