

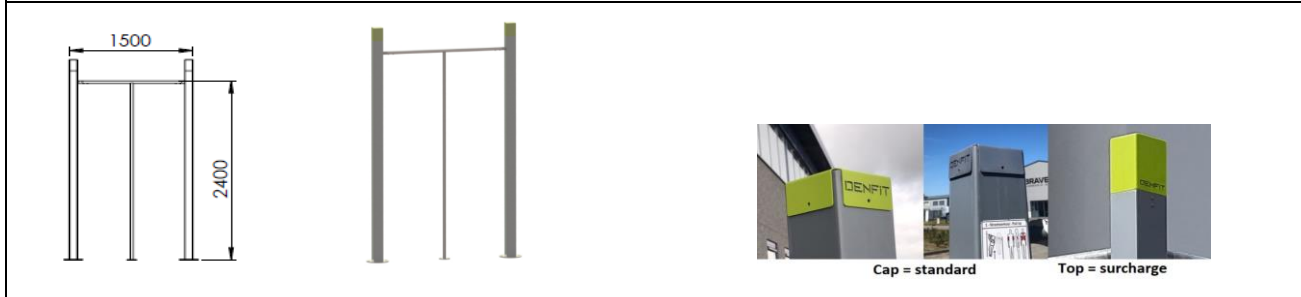


DSW 4410/4460 Fitness Pole technical information

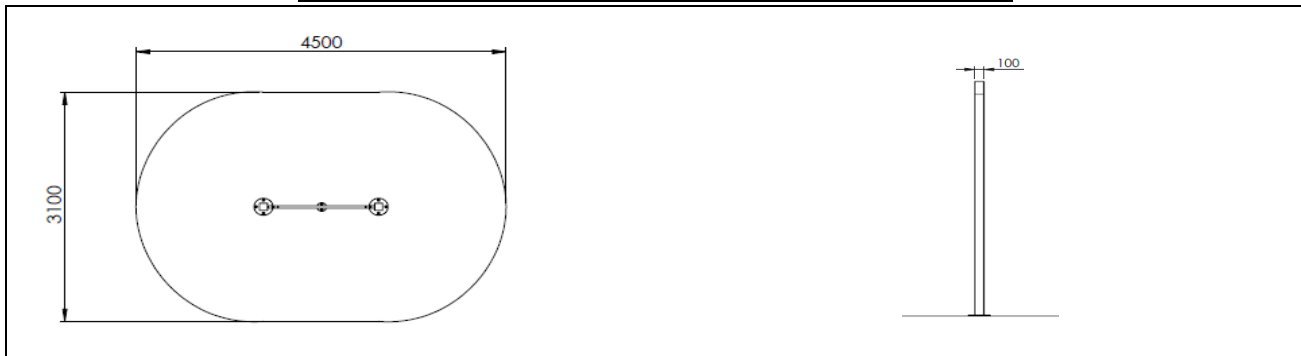


| | Posts | Bars | Caps | Tops = option |
|------------------------------------------|---------------------------------------------------------------------------|------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Material | steel, hot dipped galvanized and texture powder coated in Gris 2400 Sablé | steel, hot dipped galvanized | Stainless steel, uncoated or coated in textured powdercoating in lime green (other colours are possible) | stainless steel and texture powder coated in Lime Green (other RAL colours are possible) |
| Dimensions | Bars: \varnothing 33,7 x 3,25 mm | Posts: 100 x 100 mm | | |
| Area of movement | 13,9 m ² | | | |
| free height of fall | 1400 mm | | | |
| Fall protection according EN16630 | No | | | |
| intended for | youth and adults >1400 mm | | | |
| max. user weight | 120 kg | | | |

Anchoring
750 mm in the ground with \varnothing 230 and \varnothing 115 mm frames
 The installation frames need to be secured with fast-setting concrete. Every hole should be 500x500x750mm and around 0,12m³ concrete is needed. The soil should be packed tightly. Follow the instructions in the installation manual.

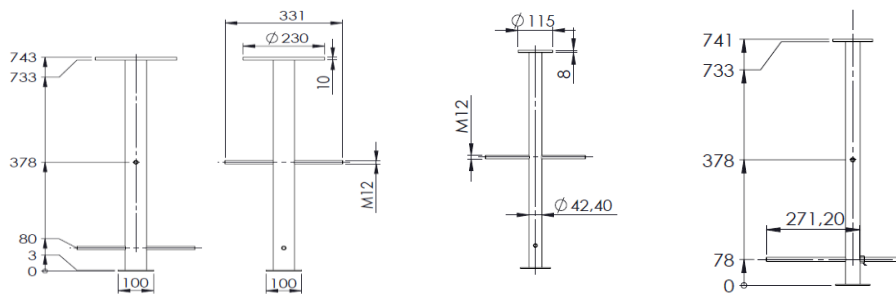

On concrete: with \varnothing 230 or 115 mm ground plate
 Chemical anchoring needs to be used; this is not included.
 Follow the instructions in the installation manual.



Notice:

Not intended for children < 1400 mm
The Denfit StreetWorkout equipment should not be used if you are suffering from physiological problems.
Avoid exaggerated physical exhaustion. In case of doubt please contact your doctor before use.
Inspect the equipment before use. Don't use it if it appears damaged or inoperable.

Certification:

EN16630:2015 - for permanently installed outdoor fitness equipment